


ELEMENTS LUXURY VINYL PLANK 5.0

SUPERIOR STABILITY & FLEXIBILITY
WITH HIGH-QUALITY MULTILAYER
LVT / FIBERGLASS ENGINEERING

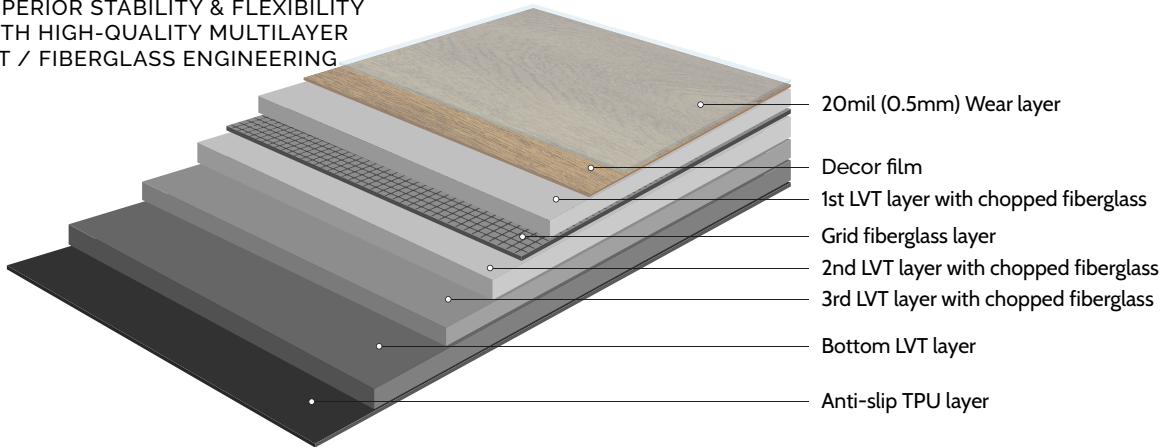


| | |
|-------------|---------------------------------------|
| Thickness: | 3/16" (5mm) |
| Wear layer: | 20mil (0.5mm) |
| Width: | 9" (228.6mm) |
| Length: | 60" (1524mm) |
| Finish: | Matte |
| Surface: | Light brushed |
| Package: | 22.5 sqft/carton 40 cartons/pallet |
| Weight: | 22 kg/carton 48.5 lb/carton |

COLOURS



FEATURES



4-sided micro bevels create real parquet look



100% waterproof flooring



Light brushed texture embossed surface




Superior flexibility



Easy repairs



Excellent underfoot comfort



Formaldehyde free & phthalates free



Pet friendly



Certified for underfloor heating system
*See installation manual for details



30 years limited residential wear warranty



15 years limited commercial wear warranty



The most recognized Indoor Air Quality Certification

SPC FLOORING TECHNICAL DATA

| Technical Characteristic | Standards | Test Method | Verdict |
|---|---|--|---|
| Size, tolerance | A tolerance of $\pm 0.4\text{mm}/305\text{mm}$ | ASTM F2055-17(2021) | Pass |
| Thickness, product | A tolerance of $\pm 0.13\text{mm}$ | ASTM F386-17 | Pass |
| Thickness, wear layer | Commercial, 0.5mm min | ASTM F410-08(2017) | Pass |
| Squareness | $\leq 0.25\text{mm}$ | ASTM F2055-17(2021) | Pass |
| Residual indentation | Average $< 8\%$ Max. $\leq 10\%$ | ASTM F1914-18 | Pass |
| Flexibility | No crack or break when using $\Phi 25.4\text{mm}$ mandrel | ASTM F137-08(2018) | Pass |
| Dimensional stability | $\leq 0.51\text{mm}/305\text{mm}$ (0.17%) | ASTM F2199-20 | Pass |
| Resistance to chemicals | No more than a slight change in surface dulling, surface attack, or staining | ASTM F925-13(2020) | Pass |
| Resistance to light | (avg, max) $\Delta E^* < 8$ | ASTM F1515-21 | Pass |
| Resistance to heat | (avg, max) $\Delta E^* < 8$ | ASTM F1514-19 | Pass |
| Effect of Castor Chair | Rotation frequency: 60r/min Abrasive wheels: CS-17 Load on each wheel: 1000g Test revolutions: 1000r | - | Pass |
| Abrasion/ Wear resistance | - | ASTM D4060-19 | 60mg |
| Fungi Resistance | - | ASTM G21-15 | Rating 0, None growth |
| Heavy Metal | - | ASTM F963-17 | Not Detected (less than the detection limit) |
| Phthalate Content Test (DBP/DEHP/BBP/DINP/DIBP/ DPENP/DHEXP/DCHP) | - | CPSC-CH-C1001-09.4 | Not Detected (less than the detection limit) |
| Acoustic Impact Noise Recuction | - | ASTM E90-09 (R2016), ASTM E492-09 (R2016) | STC 63/IIC55 |
| Thermal Conductivity | - | ASTM C518-21 | 0.139 W(m.K) |
| Thermal Resistance | - | - | 0.036 (m2.K)/W |
| Specific Optical Density of Smoke | - | ASTM E662 | < 450 |
| Critical Radiant Flux | - | ASTM E648/ NFPA classification | Class 1 |